

The pipe threaded union coupling is manufactured to the highest quality standards in accordance with ANSI and AWWA specifications, ensuring reliable performance even in the presence of vibrations.

With stainless steel bolts and high-quality welding, this product is designed for durability and long service life.

We also offer custom sizes and can manufacture with specialty materials such as stainless steel and galvanized steel.



**WE MANUFACTURE**  
**CUSTOM PRODUCTS**




Pipe coupling  
6" Steel - Steel  
**Style 38**



Pipe coupling  
14" Steel - Steel  
**Style 38**

**Materials of Construction**

A	Middle Ring	ASTM A-36
B	Side rings	ASTM A-36
C	Bolts	AISI 304 stainless steel
D	Nuts	ASTM B633
E	Gasket	According to ASTM D2000 standard
F	Flat Washer	ASTM B633

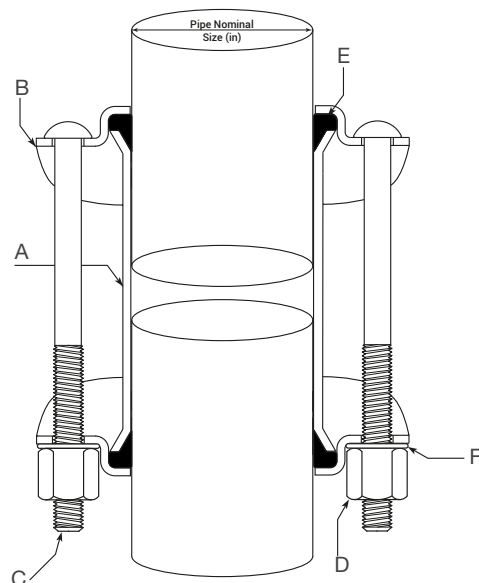

### INFORMATION TABLE

\*Pipe Fittings: Standard **300 PSI pressure rating**\*

Reference Dresser Part *Number*	Pipe Nominal Size (in)	Outside Pipe Diameter (mm)	Middle Ring Thickness x Length (mm)	Bolts Quantity Diam/Length (in)	Working pressure (psi)	Approximate weight (kg)
PTAG-UN-011	2	61	4 x 100	2 x 1/2"	300	2,02
PTAG-UN-015	3	90	4 x 105	3 x 1/2"	300	3,05
PTAG-UN-020	4	115	5 x 105	4 x 1/2"	300	4,26
PTAG-UN-028	6	170	6 x 105	6 x 1/2"	300	7,02
PTAG-UN-032	8	220	6 x 105	8 x 5/8"	300	9.13
PTAG-UN-037	10	273	6 x 125	8 x 5/8"	300	13,05
PTAG-UN-041	12	324	6 x 175	8 x 5/8"	300	21,88
PTAG-UN-043	14	356	6 x 175	8 x 5/8"	300	27,80
PTAG-UN-044	16	407	6 x 175	10 x 5/8"	300	31,20
PTAG-UN-046	18	458	6 x 175	10 x 5/8"	300	35,04
PTAG-UN-047	20	508	6 x 175	12 x 5/8"	300	-
PTAG-UN-049	24	610	6 x 175	14 x 5/8"	300	41,50

\*Pipe Fittings: Standard **Others standard pressure**

Reference Dresser Part *Number*	Pipe Nominal Size (in)	Outside Pipe Diameter (mm)	Middle Ring Thickness x Length (mm)	Bolts Quantity Diam/Length (in)	Working pressure (psi)	Approximate weight (kg)
PTAG-UN-060	2	61	4 x 127	2 x 5/8	300	-
PTAG-UN-061	2	61	4 x 127	3 x 5/8	1500	-
PTAG-UN-062	3	89	4 x 102	3 x 5/8	*	-
PTAG-UN-063	3	89	4 x 127	4 x 5/8	982	-
PTAG-UN-064	4	115	5 x 102	3 x 5/8	*	-
PTAG-UN-065	4	115	5 x 127	4 x 5/8	931	-
PTAG-UN-066	6	169	4 X 102	4 x 1/2	*	-
PTAG-UN-067	6	168	6 X 127	6 x 5/8	1029	-
PTAG-UN-068	8	220	5 x 102	6 x 1/2	*	-
PTAG-UN-069	8	220	6 x 127	6 x 5/8	807	-

\*Pipe Fittings: Standard **Others standard pressure**

Reference Dresser Part *Number*	Pipe Nominal Size (in)	Outside Pipe Diameter (mm)	Middle Ring Thickness x Length (mm)	Bolts Quantity Diam/Length (in)	Working pressure (psi)	Approximate weight (kg)
PTAG-UN-070	8	220	6 x 178	6 x 5/8	807	-
PTAG-UN-071	10	254	6 x 127	8 x 5/8	703	-
PTAG-UN-072	10	273	6 x 127	8 x 5/8	657	-
PTAG-UN-073	10	273	6 x 178	8 x 5/8	657	-
PTAG-UN-074	10	273	9 x 178	8 x 5/8	813	-
PTAG-UN-075	12	305	6 x 178	8 x 5/8	591	-
PTAG-UN-076	12	324	6 x 127	8 x 5/8	558	-
PTAG-UN-077	12	324	6 x 178	8 x 5/8	558	-
PTAG-UN-078	12	324	9 x 178	8 x 5/8	754	-
PTAG-UN-079	14	356	6 x 178	8 x 5/8	510	-
PTAG-UN-080	14	356	9 x 178	8 x 5/8	813	-
PTAG-UN-081	16	406	6 x 178	10 x 5/8	449	-
PTAG-UN-082	16	406	8 x 178	10 x 5/8	537	-
PTAG-UN-083	18	457	6 x 178	10 x 5/8	401	-
PTAG-UN-084	18	457	9 x 178	10 x 5/8	595	-
PTAG-UN-085	20	508	6 x 178	12 x 5/8	362	-
PTAG-UN-086	20	508	9 x 178	12 x 5/8	538	-
PTAG-UN-087	24	610	6 x 178	14 x 5/8	304	-
PTAG-UN-088	24	610	9 x 178	14 x 5/8	451	-
PTAG-UN-089	30	762	6 x 178	16 x 5/8	243	-
PTAG-UN-090	30	762	9 x 178	16 x 5/8	303	-
PTAG-UN-091	36	914	9 x 178	18 x 5/8	451	-
PTAG-UN-092	42	1067	9 x 178	20 x 5/8	346	-
PTAG-UN-093	48	1219	9 x 178	22 x 5/8	304	-